



Large LED Display Solutions For Meeting Rooms and Classrooms




Interactive Touch Displays

65" & 75"

- 4K UHD Resolution (3840 x 2160)
- Anti-Glare & Lightweight
- Wall Mount Included
- Built-in White Board, Wi-Fi, and Web Browser
- Up to 10 Touch Points on Windows
- Multi-Gesture on MAC
- Chromebook Compatible
- Front HDMI & Touch USB Input
- Front Built-In Speakers



Models:
 TS65M10E 65"
 TS75M10E 75"

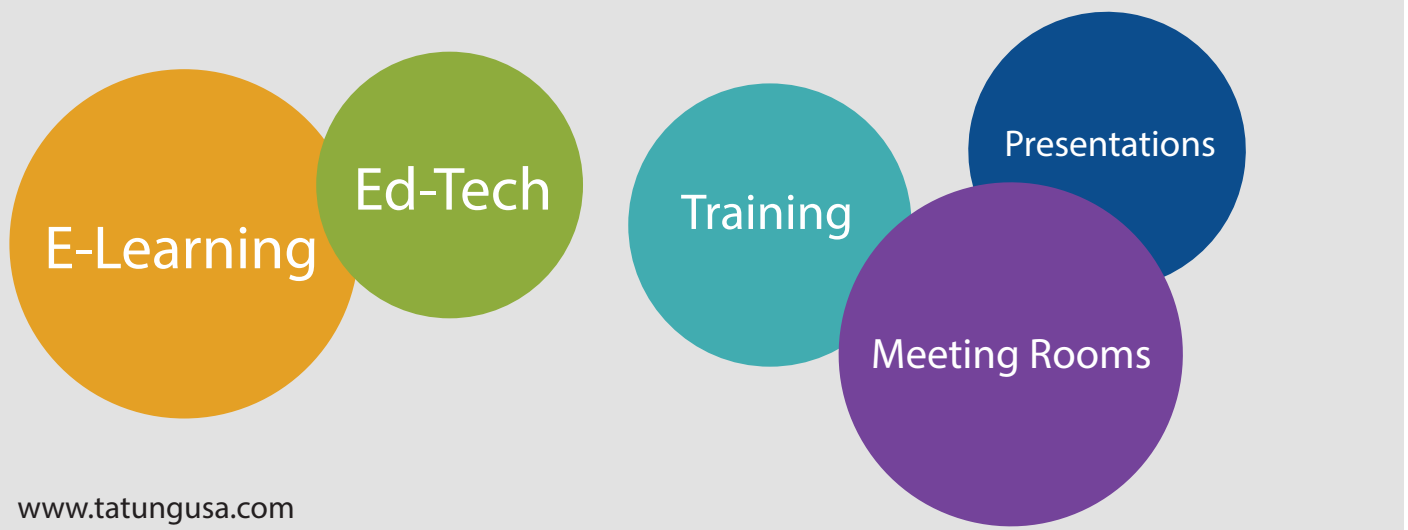

Commercial Non-Touch Displays



75" & 86"

- 4K UHD Resolution (3840 x 2160)
- HDMI In, HDMI Out
- RS32 In, RS32 Out
- Wall Mount Included

Models:
TME75 75"
TME86 86"

Commercial
Grade

Lightweight

Mobile Stand (Option)



Compatible with
Tatung's 65" and 75"
Interactive Touch Displays
and 75" & 86" Non Touch 4K
Displays

Model: TS-STAND

Display Specifications

	65" LED Touch	75" LED Touch	75" LED	86" LED
Model	TS65M10E	TS75M10E	TME75	TME86
Anti-Glare Screen	Yes	Yes	No	No
Resolution	3840 x 2160	3840 x 2160	3840 x 2160	3840 x 2160
Touch Screen (OS) Support	*Windows 7*, 8, 10 MAC 10.6-10.13 Chromebook	*Windows 7*, 8, 10 MAC 10.6-10.13 Chromebook	Non-Touch	Non-Touch
Windows/Linux Touch Points	*10	*10	N/A	N/A
MAC Touch Points	1	1	N/A	N/A
CPU	ARM A53	ARM A53	ARM A53	ARM A53
Brightness	450 nits	450 nits	450 nits	400 nits
Contrast Ratio	1200:1	1200:1	1200:1	1200:1
Connectivity	HDMI In x 5, HDMI Out, LAN VGA, PC In, SPDIF Component Video In Composite AV In/Out, USB (touch) x5 USB 2.0 (media) x2 USB 3.0 (media) x 2 USB (OPS PC) RS232 In/Out (Control Port) Wifi via USB Dongle	HDMI In x 5, HDMI Out, LAN VGA, PC In, SPDIF Component Video In Composite AV In/Out, USB (touch) x5 USB 2.0 (media) x2 USB 3.0 (media) x 2 USB (OPS PC) RS232 In/Out (Control Port) Wifi via USB Dongle	HDMI (In) x 4 HDMI (Out) x 1 VGA PC Audio (In) YPbPr AV (In) AV (Out) SPDIF (Out) USB x 3 RS232 In / Out, LAN	HDMI (In) x 4 HDMI (Out) x 1 VGA PC Audio (In) YPbPr AV (In) AV (Out) SPDIF (Out) USB x 3 RS232 In / Out, LAN
Panel Life	50,000 Hours	50,000 Hours	30,000 Hours	30,000 Hours
Touch Response Time	10ms	10ms	10ms	10ms
Audio	10 x 2 watts	10 x 2 watts	10 x 2 watts	10 x 2 watts
Viewing Angle	89/89/89/89	89/89/89/89	89/89/89/89	89/89/89/89
Power Consumption	<170 watts	<310 watts	400 watts	440 watts
Product Dimensions W/D/H	59.11" x 4.18" x 36.48"	68.38" x 4.37" x 41.56"	67.49" x 3.83" x 39.07"	77.24" x 4.04" x 44.71"
Packaging Dimensions	69.49" x 12.6" x 45.87"	78.35" x 13.78" x 45.87"	78.35" x 12.6" x 45.87"	86.61" x 14.17" x 53.94"
VESA Mounting	400mm x 400mm (M8)	600mm x 400mm (M8)	600mm x 400mm (M8)	700mm x 400mm (M8)
Physical Weight	114 lbs 127 lbs with included mount	128 lbs 141 lbs with included mount	84.99 lbs 97.99 lbs with included mount	142.75 lbs 155.75 lbs with included mount
Packaging Weight	142 lbs	179.74 lbs	128.53 lbs	186.18 lbs
3 Year Warranty	Yes	Yes	Yes	Yes
Accessories	Wall Mount, Remote, Stylus (2) Batteries (2), Power Cord 10ft HDMI Cable 10ft USB Cable CD (touch driver) Wifi Dongle	Wall Mount, Remote, Stylus (2) Batteries (2), Power Cord 10ft HDMI Cable 10ft USB Cable CD (touch driver) Wifi Dongle	Remote Power Cord Wall Mount	Remote Power Cord Wall Mount

Specifications subject to change without notice. Doc#227.18

Tatung Company of America, Inc. : Display Solutions Division : www.tatungusa.com

Tel: 1-800-829-2850 Ext 112 or 111 Email: interactive@tatungusa.com

Follow TatungUSA

ADVANCE COMMUNICATIONS & CONSULTING, INC.

advancecomm.net
661-664-0177